

CAN AM RYKER 18+ REAR RACK INSTALLATION INSTRUCTIONS


IMPORTANT:

Read instructions in their entirety before attempting installation.


WARNING: Installation of this product may require professional mechanical skills. If you are not certain of your abilities, consult your local professional. Always carefully and gently finger start screws to prevent cross threading. Start all screws and assure they are threading properly before final tightening.

Tools needed:

1. 4mm or 5/32 hex wrench
2. 10 mm socket drive or wrench
3. 7/32 hex if optional backrest purchased

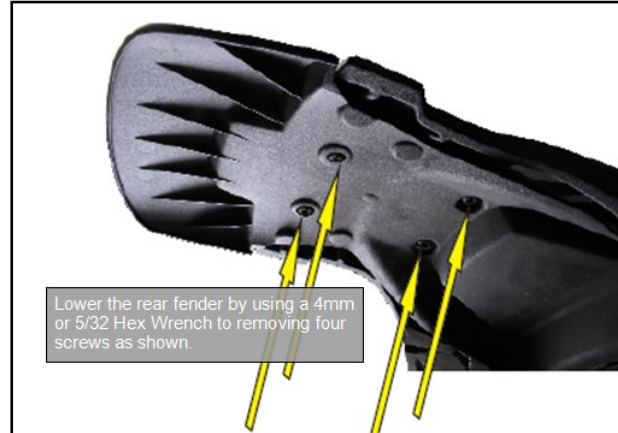

Step 1. Lower the rear fender by removing the four screws at locations noted above.

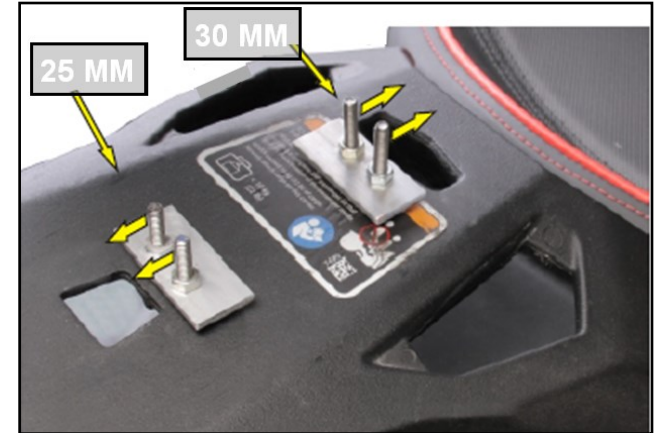

Step 2. Install the threaded mounting hardware.
Important: Note the off-set location of the bolts on the metal tabs and orient hardware as shown.



Step 3. Install the support plate as shown. Use the m6 washers with M6 lock nuts. Do the same for the front LONG 30mm bracket with the bolts facing the front of the hole.



Step 4. Install the support plate as shown. Use a 10mm wrench or socket to spin down all four nuts so they are still a little loose. Center the luggage plate and tighten. Pull up to check that it is fully secure.



Step 5. Install the luggage plate. Use four 1/4 20 x 1 flat head counter sunk crews to mount luggage rack to base.